

# HSAJET® Controller Unit CUF

The HSAJET® CUF controller is for high resolution printing for up to 2" print height

## HSAJET® Controlle-r Unit

The HSAJET® Controller Unit (CUF) is the ideal printing solution for small messages i.e. for printing text, barcode, counters, date/time and graphics. Ideal for integration on webs, inserters, folders, collators and other equipment.

It is a very compact solution and calls for a minimum of maintenance, moreover only a minimum of skill and training is required to operate and maintain the Controller Unit. The design is made in stainless steel and can easily be implemented in production areas.

## HP TIJ 2.5 technology

The HSAJET® Controller Unit is based upon reliable HP TIJ 2.5 technology which delivers consistent, high-quality, fast printing, exceptional value, and ease of use.

## Printheads

The CUF is compatible with the HSAJET® F-type printheads and is able to control up to 4 pens (2" print height). You can add max. 2 printheads either as single printheads of 1-, 2-, 3-, and 4-pens or in a combination of 1+1-pen, 2+2-pen, 1+2-pen, 1+3-pen with an HPHF Jumper Box.

## Bidirectional and Double Printing

With the Controller Unit bidirectional printing is supported. This enables you to print from the opposite side using the same layout. The CUF also supports double printing, which enables you to print the same layout simultaneously in same printing direction, e.g. on two sides of a box.

## Connection

The Controller Unit is equipped with ethernet and serial communication allowing full remote controlled variable printing. In combination with HSAJET® printheads it has the function of a stand-alone system.



THE CUF HAS INTEGRATED  
KEYBOARD & DISPLAY

## Protection of Print Jobs

You can protect the access to the CUF by adding a password. With a password protection you minimize the risk of altering any print jobs by mistake. Additionally you are able to lock objects in the print layout to protect them from unintended changes.

## Print at breakthrough speeds of up to 300 m/min (984 ft/min) in 300 x 150 dpi

- GRAPHICS
- TEXT (ALPHANUMERICAL)
- COUNTERS
- VARIABLE TEXT (PROMPT)
- DATE & TIME (REAL-TIME & ADJUSTED)
- LINEAR & 2D BARCODES (FIXED)\*
- WINDOWS FONTS

\* For information on specific barcodes please go to [www.hsasystems.com](http://www.hsasystems.com)

# Technical Details



## HSAJET® CONTROLLER UNIT CUF

### Technology

HP TIJ 2.5

### Print height

Up to 50.8 mm / 2"

### Printheads

1-, 2-, 3- or 4-pen printheads

### Print distance

0.5-2.0 mm (nozzle to print surface)

### Voltage

100-240 VAC

### Print buffer

CUF: 64 MB

### Memory

CF card: <2 GB

### Screen

2 line LCD display

### Design software

OBJ InkDraw (special section)

### Software menu language

English (multiple languages)

### Print options

Left/Right  
Upside-down  
Other side  
Bidirectional

### Layout features

Max. length 65000 px  
(~277 cm in 600 DPI)  
Works with mm/inch/point/pixel

### Remote controlling

Start/stop  
Exchange job  
Change field content per print  
Change print preferences/parameters

### Interface

CF card (FAT format, max 2. GB)  
RS232 (serial)  
Ethernet (LAN) 100 Mbit  
Encoder Input 3-33 V (SUB D9)  
In-/output 3-33 V (SUB D9)

### Signals

Low ink signal  
Print signal  
Print message signal

Resolution (DPI) (horizontal x vertical)	Max. speed	
	m / min	feet / min
600 x 600	38	125
300 x 300	76	250
300 x 300 HS*	152	500
300 x 150 HS*	306	1000

\*High speed

### Complies to

CE directives

### Housing


Stainless steel

### Weight


1.4 kg / 3.1 lbs

### Accessories

- Compact flash card (CF)
- CF card reader/writer for PC
- Sensor and encoder
- Bridges & Brackets
- Mountings (Inocon 53 mm)
- F-type printheads (see other flyer)
- HPHF Jumper Box



84 mm / 3.3"

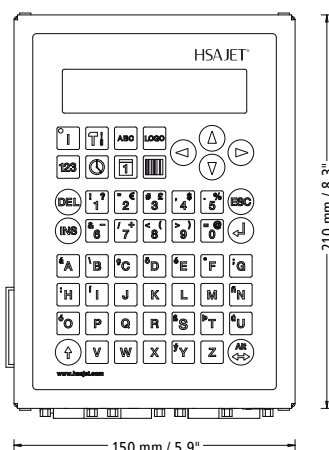

210 mm / 8.3"

150 mm / 5.9"



Jumper Box for data selection on HPHF printers

CHECK OUR WEBSITE FOR LATEST REVISION OF THIS DATASHEET

DISTRIBUTOR:



150 William Street  
Perth Amboy, NJ 08861  
Toll Free: 1-800-298-8936  
Local: 1-732-324-0800  
Fax: 1-732-324-4488  
sales@hsausa.com  
www.hsausa.com